

Consumer Tires 2023

FORTUNE
TIRES

DRIVE FORWARD

FORTUNETIREUSA.COM

VIENTO

FSR702

50K

M+S

M+S

ALL-SEASON ULTRA HIGH PERFORMANCE TIRE

FEATURES & BENEFITS:

- Unique tread pattern design evacuates water, reduces hydroplaning, and improves braking and wet handling performance
- The asymmetrical tread design, along with the higher speed ratings, improves handling and performance at highway speeds
- Utilizes our PNS (Pattern Noise Simulation) technology for reduced road noise and a quieter ride
- Nano Blend Compound ensures consistency of performance through the lifecycle



HIGH PERFORMANCE

50,000 MILE WARRANTY

SAP CODE	TIRE SIZE	UTQG LOAD RANGE	SIDEWALL	WEIGHT (LBS)	RIM WIDTH (IN)	RIM RANGE	MAX PSI	MAX LOAD SINGLE / DUAL	OD (IN)	SW (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
3522030807	205/55ZR16 XL 94W	500AA	BSW	19.3	6.5	5.5-7.5	50	1477	24.9	8.4	10	1N+2S+1P
3528030813	215/55ZR16 XL 97W	500AA	BSW	22.3	7.0	6-7.5	50	1609	25.3	8.9	10	1N+2S+2P
3715030807	205/45ZR16 XL 87W	500AA	BSW	18.6	7.0	6.5-7.5	50	1201	23.2	8.1	10	1N+2S+1P
3529030807	215/55ZR17 SL 94W	500AA	BSW	22.3	7.0	6-7.5	51	1477	26.3	8.9	10	1N+2S+1P
3538030807	225/55ZR17 SL 97W	500AA	BSW	25.2	7.0	6-8	44	1609	26.8	9.2	10	1N+2S+2P
3543030813	235/55ZR17 SL 99W	500AA	BSW	25.9	7.5	6.5-8.5	51	1709	27.2	9.6	10	1N+2S+2P
3622030807	205/50ZR17 XL 93W	500AA	BSW	20.4	6.5	5.5-7	50	1433	25.1	8.4	10	1N+2S+1P
3627030807	215/50ZR17 XL 95W	500AA	BSW	22.4	7.0	6-8	50	1521	25.5	8.9	10	1N+2S+2P
3634030807	225/50ZR17 XL 98W	500AA	BSW	24.2	7.0	6-8	50	1653	25.9	9.2	10	1N+2S+2P
3717030807	205/45ZR17 XL 88W	500AA	BSW	19.8	7.0	6.5-7.5	50	1235	24.3	8.1	10	1N+2S+1P
3723030807	215/45ZR17 XL 91W	500AA	BSW	20.3	7.0	7-8	50	1356	24.6	8.4	10	1N+2S+1P
3732030807	225/45ZR17 XL 94W	500AA	BSW	21.0	7.5	7-8.5	50	1477	25.0	8.9	10	1N+2S+1P
3740030807	235/45ZR17 XL 97W	500AA	BSW	23.8	8.0	7.5-9	50	1609	25.4	9.3	10	1N+2S+2P
3750030907	245/45ZR17 XL 99Y	500AA	BSW	24.8	8.0	7.5-9	50	1709	25.7	9.6	10	1N+2S+2P
3837030807	245/40ZR17 XL 95W	500AA	BSW	23.7	8.5	8-9.5	50	1521	24.7	9.8	10	1N+2S+2P
3846030807	255/40ZR17 XL 98W	500AA	BSW	23.1	9.0	8.5-10	50	1477	25.0	10.2	10	1N+2S+1P
3898030813	275/40ZR17 XL 102W	500AA	BSW	26.6	9.5	9-11	50	1875	25.7	10.9	10	1N+2S+2P
3635030907	225/50ZR18 SL 95Y	500AA	BSW	25.3	7.0	6-8	51	1521	26.9	9.2	10	1N+2S+2P
3641030913	235/50ZR18 XL 101Y	500AA	BSW	25.9	7.5	6.5-8.5	50	1819	27.3	9.6	10	1N+2S+2P
3725030907	215/45ZR18 XL 93Y	500AA	BSW	21.3	7.0	7-8	50	1433	25.6	8.4	10	1N+2S+1P
3734030907	225/45ZR18 XL 95Y	500AA	BSW	23.5	7.5	7-8.5	50	1521	25.9	8.9	10	1N+2S+2P
3742030907	235/45ZR18 XL 98Y	500AA	BSW	25.1	8.0	7.5-9	50	1653	26.3	9.3	10	1N+2S+2P
3752030907	245/45ZR18 XL 100Y	500AA	BSW	25.9	8.0	7.5-9	50	1764	26.7	9.6	10	1N+2S+2P
3760030907	255/45ZR18 XL 103Y	500AA	BSW	26.9	8.5	8-9.5	50	1709	27.0	10.0	10	1N+2S+2P
3828030907	225/40ZR18 XL 92Y	500AA	BSW	21.0	8.0	7.5-9	50	1389	25.1	9.1	10	1N+2S+1P
3834030907	235/40ZR18 XL 95Y	500AA	BSW	23.6	8.5	8-9.5	50	1521	25.4	9.5	10	1N+2S+2P
3840030907	245/40ZR18 XL 97Y	500AA	BSW	24.8	8.5	8-9.5	50	1609	25.7	9.8	10	1N+2S+2P
3849030907	255/40ZR18 XL 99Y	500AA	BSW	25.7	9.0	8.5-10	50	1709	26.0	10.2	10	1N+2S+2P
3873030913	275/40ZR18 XL 103Y	500AA	BSW	28.3	9.5	9-11	50	1929	26.7	10.9	10	1N+2S+2P
3924030913	245/35ZR18 XL 92Y	500AA	BSW	22.0	8.5	8-9.5	50	1389	24.8	9.5	9.5	1N+2S+1P
3934030907	255/35ZR18 XL 94Y	500AA	BSW	22.6	9.0	8.5-10	50	1477	25.0	10.2	9.5	1N+2S+1P
3942030907	265/35ZR18 XL 97Y	500AA	BSW	25.3	9.5	9-10.5	50	1609	25.3	10.7	9.5	1N+2S+2P
3951030813	275/35ZR18 XL 99W	500AA	BSW	26.4	9.5	9-11	50	1710	25.6	10.9	9.5	1N+2S+2P
3754030907	245/45ZR19 XL 102Y	500AA	BSW	26.7	8.0	7.5-9	50	1874	27.7	9.6	9.5	1N+2S+2P
3830030907	225/40ZR19 XL 93Y	500AA	BSW	21.9	8.0	7.5-9	50	1433	26.1	9.1	9.5	1N+2S+1P
3842030907	245/40ZR19 XL 98Y	500AA	BSW	25.6	8.5	8-9.5	50	1653	26.7	9.8	9.5	1N+2S+2P
3851030907	255/40ZR19 XL 100Y	500AA	BSW	26.5	9.0	8.5-10	50	1764	27.0	10.2	9.5	1N+2S+2P
3872030907	275/40ZR19 XL 105Y	500AA	BSW	28.7	9.5	9-11	50	2039	27.7	10.9	9.5	1N+2S+2P
3919030907	235/35ZR19 XL 91Y	500AA	BSW	21.9	8.5	8-9.5	50	1356	25.5	9.5	9.5	1N+2S+1P
3926030913	245/35ZR19 XL 93Y	500AA	BSW	22.8	8.5	8-9.5	50	1433	25.8	9.8	9.5	1N+2S+1P
3936030907	255/35ZR19 XL 96Y	500AA	BSW	25.3	9.0	8.5-10	50	1565	26.0	10.2	9.5	1N+2S+2P
3953030907	275/35ZR19 XL 100Y	500AA	BSW	27.7	9.5	9-11	50	1764	26.6	10.9	9.5	1N+2S+2P
3090030907	285/35ZR19 XL 103Y	500AA	BSW	28.9	10.0	9.5-11	50	1929	26.9	11.4	9.5	1N+2S+2P
3147030913	265/30ZR19 XL 93Y	500AA	BSW	23.7	9.5	9-10	50	1435	25.3	10.7	9.5	1N+2S+1P
3169030913	305/30ZR19 XL 102Y	500AA	BSW	29.0	11.0	10.5-11.5	50	1875	26.3	12.3	9.5	1N+2S+2P
3700030907	245/45ZR20 XL 103Y	500AA	BSW	28.0	8.0	7.5-9	50	1929	28.7	9.6	9.5	1N+2S+2P
3699030907	255/45ZR20 XL 105Y	500AA	BSW	29.1	8.5	8-9.5	50	2039	29.1	10.0	9.5	1N+2S+2P
3844030907	245/40ZR20 XL 99Y	500AA	BSW	26.7	8.5	8-9.5	50	1709	27.7	9.8	9.5	1N+2S+2P
3928030907	245/35ZR20 XL 95Y	500AA	BSW	24.1	8.5	8-9.5	50	1521	26.8	9.8	9.5	1N+2S+1P
3938030907	255/35ZR20 XL 97Y	500AA	BSW	26.3	9.0	8.5-10	50	1609	27.0	10.2	9.5	1N+2S+2P
3156030907	285/30ZR20 XL 99Y	500AA	BSW	28.3	10.0	9.5-10.5	50	1709	26.8	11.4	9.5	1N+2S+2P
840139636394	235/30ZR22 XL 90W	500AA	BSW	24.8	8.5	8.5	50	1325	27.6	9.5	9.5	1N+2S+1P
840139636400	245/30ZR22 XL 92W	500AA	BSW	26.0	8.5	8-9	50	1389	27.8	9.8	9.5	1N+2S+1P
840139636417	255/30ZR22 XL 95W	500AA	BSW	26.1	9.0	8.5-9.5	50	1520	28.1	10.2	9.5	1N+2S+1P
840139636295	275/30ZR24 XL 101Y	500AA	BSW	32.0	9.5	9-10	50	1820	30.6	10.9	9.5	1N+2S+2P

PERFECTUS

FSR602

60K

M+S

M+S

THE ULTIMATE TOURING TIRE FOR COMFORT & SAFETY

FEATURES & BENEFITS:

- Asymmetrical tread design improves handling and performance when passing and cornering
- Four wide grooves improve traction and handling in wet conditions
- Unique siping and pattern design provides improved braking in wet and snow traction
- Continuous rib design ensures stability and reduces abnormal wear
- Utilizes our PNS (Pattern Noise Simulation) technology for reduced road



SAP CODE	TIRE SIZE	UTQG LOAD RANGE	SIDEWALL	WEIGHT (LBS)	RIM WIDTH (IN)	RIM RANGE	MAX PSI	MAX LOAD SINGLE / DUAL	OD (IN)	SW (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
3221030503	175/70R14 SL 84T	540AA	BSW	16.1	5.0	4.5 - 6	44	1102	23.7	7.0	9.5	1N+2S+1P
3233030512	195/70R14 SL 91T	600AA	BSW	19.1	6.0	5-6.5	44	1356	24.8	7.9	9.5	1N+2S+2P
3312030503	175/65R14 SL 82T	540AA	BSW	15.4	5.0	5.0 - 6.0	44	1047	23.0	7.0	9.5	1N+2S+1P
3316030603	185/65R14 SL 86H	540AA	BSW	16.4	5.5	5-6.5	44	1168	23.5	7.4	9.5	1N+2S+1P
3238030603	205/70R15 SL 96H	600AA	BSW	22.4	6.0	5-7	44	1565	26.3	8.2	10	1N+2S+2P
3241030503	215/70R15 SL 98T	600AA	BSW	24.9	6.5	5.5-7	44	1653	26.9	8.7	10	1N+2S+2P
3314030603	175/65R15 SL 84H	540AA	BSW	16.3	5.0	5-6	44	1102	24.0	7.0	9.5	1N+2S+1P
3318030603	185/65R15 SL 88H	540AA	BSW	17.3	5.5	5-6.5	44	1235	24.4	7.4	9.5	1N+2S+1P
3325030603	195/65R15 SL 91H	600AA	BSW	19.0	6.0	5.5-7	44	1356	25.0	7.9	10	1N+2S+1P
3330030603	205/65R15 XL 99H	600AA	BSW	21.5	6.0	5.5-7.5	50	1709	25.5	8.2	10	1N+2S+2P
3415030603	185/60R15 SL 84H	540AA	BSW	16.5	5.5	5-6.5	44	1102	23.7	7.4	9.5	1N+2S+1P
3420030603	195/60R15 SL 88H	600AA	BSW	17.8	6.0	5.5-7	44	1235	24.2	7.9	10	1N+2S+1P
3505030612	175/55R15 SL 77H	540AA	BSW	15.7	5.5	5-6	44	908	22.6	7.2	9.5	1N+2S+1P
3509030703	185/55R15 SL 82V	540AA	BSW	16.5	6.0	5-6.5	44	1047	23.0	7.6	10	1N+2S+1P
3515030703	195/55R15 SL 85V	600AA	BSW	17.2	6.0	5.5-7	44	1135	23.4	7.9	10	1N+2S+1P
3601030712	165/50R15 SL 72V	540AA	BSW	13.6	5.0	4.5-5.5	44	783	21.5	6.7	9.5	1N+2S+1P
3612030712	195/50R15 XL 86V	600AA	BSW	17.1	6.0	5.5-7	50	1168	22.7	7.9	10	1N+2S+1P
3239030603	205/70R16 SL 97H	600AA	BSW	23.5	6.0	5-7	44	1609	27.3	8.2	10	1N+2S+2P
3242030612	215/70R16 SL 100H	600AA	BSW	26.1	6.5	5.5-7	44	1764	27.9	8.7	10	1N+2S+2P
3247030603	225/70R16 SL 103H	600AA	BSW	28.1	6.5	6-7.5	44	1929	28.4	9.0	10	1N+2S+2P
3253030603	235/70R16 SL 106H	600AA	BSW	29.6	7.0	6-8	44	2094	29.0	9.4	10	1N+2S+2P
3331030603	205/65R16 SL 95H	600AA	BSW	22.7	6.0	5.5-7.5	44	1521	26.5	8.2	10	1N+2S+2P
3335030603	215/65R16 SL 98H	600AA	BSW	24.3	6.5	6-7.5	44	1653	27.0	8.7	10	1N+2S+2P
3340030603	225/65R16 SL 100H	600AA	BSW	25.7	6.5	6-8	44	1764	27.5	9.0	10	1N+2S+2P
3343030603	235/65R16 SL 103H	600AA	BSW	27.0	7.0	6.5-8.5	44	1929	28.0	9.4	10	1N+2S+2P
3426030703	205/60R16 SL 92V	600AA	BSW	20.7	6.0	5.5-7.5	44	1389	25.7	8.2	10	1N+2S+1P
3431030703	215/60R16 SL 95V	600AA	BSW	23.1	6.5	6-7.5	44	1521	26.1	8.7	10	1N+2S+2P
3436030703	225/60R16 SL 98V	600AA	BSW	24.5	6.5	6-8	44	1653	26.6	9.0	10	1N+2S+2P
3442030603	235/60R16 SL 100H	600AA	BSW	25.8	7.0	6.5-8.5	44	1764	27.1	9.4	10	1N+2S+2P
3511030603	185/55R16 SL 83H	540AA	BSW	17.5	6.0	5-6.5	44	1074	24.0	7.6	10	1N+2S+1P
3517030703	195/55R16 SL 87V	600AA	BSW	18.3	6.0	5.5-7	44	1201	24.4	7.9	10	1N+2S+1P
3521030703	205/55R16 XL 94V	600AA	BSW	19.6	6.5	5.5-7.5	50	1477	24.9	8.4	10	1N+2S+1P
3528030703	215/55R16 XL 97V	600AA	BSW	21.7	7.0	6-7.5	50	1609	25.3	8.9	10	1N+2S+2P
3613030703	195/50R16 SL 84V	600AA	BSW	18.0	6.0	5.5-7	44	1102	23.7	7.9	10	1N+2S+1P
3337030603	215/65R17 SL 99H	600AA	BSW	25.4	6.5	6-7.5	44	1709	28.0	8.7	10	1N+2S+2P
3341030603	225/65R17 SL 102H	600AA	BSW	26.9	6.5	6-8	44	1874	28.5	9.0	10	1N+2S+2P
3346030703	235/65R17 XL 108V	600AA	BSW	28.1	7.0	6.5-8.5	50	2205	29.1	9.4	10	1N+2S+2P
3476030603	215/60R17 XL 100H	600AA	BSW	24.4	6.5	6-7.5	50	1764	27.2	8.7	10	1N+2S+2P
3438030703	225/60R17 SL 99V	600AA	BSW	25.6	6.5	6-8	44	1709	27.6	9.0	10	1N+2S+2P
3444030703	235/60R17 SL 102V	600AA	BSW	27.3	7.0	6.5-8.5	44	1874	28.1	9.4	10	1N+2S+2P
3529030703	215/55R17 SL 94V	600AA	BSW	22.3	7.0	6-7.5	44	1477	26.3	8.9	10	1N+2S+1P
3538030703	225/55R17 SL 97V	600AA	BSW	24.9	7.0	6-8	44	1609	26.8	9.2	10	1N+2S+2P
3543030703	235/55R17 SL 99V	600AA	BSW	26.2	7.5	6.5-8.5	44	1709	27.2	9.6	10	1N+2S+2P
3622030703	205/50R17 XL 93V	600AA	BSW	20.1	6.5	5.5-7.5	50	1433	25.1	8.4	10	1N+2S+1P
3627030703	215/50R17 XL 95V	600AA	BSW	22.2	7.0	6-7.5	50	1521	25.5	8.9	10	1N+2S+2P
3634030712	225/50R17 XL 98V	600AA	BSW	24.1	7.0	6-8	50	1653	25.9	9.2	10	1N+2S+2P
3638030703	235/50R17 SL 96V	600AA	BSW	25.1	7.5	6.5-8.5	44	1565	26.3	9.6	10	1N+2S+2P
3644030703	245/50R17 SL 99V	600AA	BSW	26.4	7.5	7-8.5	44	1709	26.7	10.0	10	1N+2S+2P
3347030603	235/65R18 SL 106H	600AA	BSW	29.6	7.0	6.5-8.5	44	2094	30.0	9.4	10	1N+2S+2P
3365030603	255/65R18 SL 111H	600AA	BSW	33.0	7.5	7-9	44	2403	31.1	10.2	10	1N+2S+2P
3439030703	225/60R18 SL 100V	600AA	BSW	26.8	6.5	6-8	44	1764	28.6	9.0	10	1N+2S+2P
3446030703	235/60R18 SL 103V	600AA	BSW	28.6	7.0	6.5-8.5	44	1929	29.1	9.4	10	1N+2S+2P
3453030703	245/60R18 SL 105V	600AA	BSW	29.7	7.0	7-8.5	44	2039	29.6	9.8	10	1N+2S+2P
3531030703	215/55R18 SL 95V	600AA	BSW	24.3	7.0	6-7.5	44	1521	27.3	8.9	10	1N+2S+2P
3540030703	225/55R18 SL 98V	600AA	BSW	26.1	7.0	6-8	44	1653	27.8	9.2	10	1N+2S+2P
3545030703	235/55R18 SL 100V	600AA	BSW	27.6	7.5	6.5-8.5	44	1764	28.1	9.6	10	1N+2S+2P
3552030712	245/55R18 SL 103V	600AA	BSW	28.3	7.5	7-8.5	44	1930	28.6	10.0	10	1N+2S+2P
3640030703	235/50R18 SL 97V	600AA	BSW	26.3	7.5	6.5-8.5	44	1609	27.3	9.6	10	1N+2S+2P
3836030712	235/40R19 XL 96V	600AA	BSW	24.5	8.5	8-9.5	50	1565	26.4	9.5	10	1N+2S+2P

TORMENTA H/T FSR305

45K

LT Sizes

60K

Metric Sizes

M+S

M+S

**HIGHWAY TERRAIN ALL-SEASON TIRE
DESIGNED FOR CUV'S, SUV'S, AND LIGHT
TRUCKS FOR LONG MILEAGE AND A
SMOOTH RIDE**

FEATURES & BENEFITS:

- Multiple siping design features ensure all-season performance, shortened braking distances, and improved safety and performance
- Central dual pitch design with PNS (Pattern Noise Simulation) technology reduces tire noise and improves ride comfort
- Four wide grooves improve traction and handling in wet conditions
- Dual steel belt with spiral wrap technology for improved uniformity and protection from heat buildup



SAP CODE	TIRE SIZE	UTQG LOAD RANGE	SIDEWALL	WEIGHT (LBS)	RIM WIDTH (IN)	RIM RANGE	MAX PSI	MAX LOAD SINGLE / DUAL	OD (IN)	SW (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
3109030404	215/75R15 SL 100T	600AB	BSW	27.0	6.0	5.5-7	44	1764	27.7	8.5	12	1N+2S+2P
3112030504	225/75R15 SL 102T	600AB	BSW	29.1	6.0	6-7.5	44	1874	28.3	8.8	12	1N+2S+2P
3117030504	235/75R15 XL 109T	600AB	BSW	30.4	6.5	6-8	50	2271	28.9	9.3	12	1N+2S+2P
3245030504	225/70R15 SL 100T	600AB	BSW	27.6	6.5	6-7.5	44	1764	27.4	9.0	12	1N+2S+2P
3114030504	225/75R16 SL 104T	600AB	BSW	30.4	6.0	6-7.5	44	1984	29.3	8.8	12	1N+2S+2P
3119030504	235/75R16 XL 112T	600AB	BSW	32.1	6.5	6-8	50	2469	29.8	9.3	12	1N+2S+2P
3120030504	245/75R16 SL 111T	600AB	BSW	34.5	7.0	6.5-8	44	2403	30.5	9.8	12	1N+2S+2P
3123030504	265/75R16 SL 116T	600AB	BSW	38.7	7.5	7-9	44	2756	31.7	10.5	12	1N+2S+2P
3242030604	215/70R16 SL 100H	600AB	BSW	27.3	6.5	5.5-7	44	1764	27.9	8.7	12	1N+2S+2P
3253030504	235/70R16 SL 106T	600AB	BSW	30.8	7.0	6-8	44	2094	29.0	9.4	12	1N+2S+2P
3258030404	245/70R16 SL 107T	600AB	BSW	32.9	7.0	6.5-8	44	2149	29.5	9.8	12	1N+2S+2P
3262030504	255/70R16 SL 111T	600AB	BSW	34.8	7.5	6.5-8.5	44	2403	30.1	10.2	12	1N+2S+2P
3267030504	265/70R16 SL 112T	600AB	BSW	36.5	8.0	7-9	44	2469	30.6	10.7	12	1N+2S+2P
3260030504	245/70R17 SL 110T	600AB	BSW	35.3	7.0	6.5-8	44	2337	30.6	9.8	12	1N+2S+2P
3263030509	255/70R17 SL 112T	600AB	BSW	36.1	7.5J	6.5-8.5	44	2470	31.1	10.2	12	1N+2S+2P
3268030504	265/70R17 SL 115T	600AB	BSW	39.0	8.0	7-9	44	2679	31.7	10.7	12	1N+2S+2P
3341030604	225/65R17 SL 102H	600AB	BSW	28.0	6.5	6-8	44	1874	28.5	9.0	11	1N+2S+2P
3346030604	235/65R17 XL 108H	600AB	BSW	30.1	7.0	6.5-8.5	50	2205	29.1	9.4	11	1N+2S+2P
3349030504	245/65R17 SL 107T	600AB	BSW	31.5	7.0	7-8.5	44	2149	29.5	9.8	11	1N+2S+2P
3354030504	265/65R17 SL 112T	600AB	BSW	37.3	8.0	7.5-9.5	44	2469	30.6	10.7	12	1N+2S+2P
3264030504	255/70R18 SL 113T	600AB	BSW	38.3	7.5	6.5-8.5	44	2535	32.1	10.2	12	1N+2S+2P
3269030504	265/70R18 SL 116T	600AB	BSW	40.4	8.0	7-9	44	2756	32.6	10.7	12	1N+2S+2P
3347030604	235/65R18 SL 106H	600AB	BSW	31.2	7.0	6.5-8.5	44	2094	30.0	9.4	11	1N+2S+2P
3365030604	255/65R18 SL 111H	600AB	BSW	36.7	7.5	7-9	44	2403	31.1	10.2	12	1N+2S+2P
3364030604	265/65R18 SL 114H	600AB	BSW	38.6	8.0	7.5-9.5	44	2601	31.5	10.7	12	1N+2S+2P
3357030504	275/65R18 SL 116T	600AB	BSW	40.5	8.0	7.5-9.5	44	2756	32.1	11.0	12	1N+2S+2P
3447030704	235/60R18 XL 107V	600AB	BSW	30.1	7.0	6.5-8.5	50	2149	29.1	9.4	11	1N+2S+2P
3453030604	245/60R18 SL 105H	600AB	BSW	30.9	7.0	7-8.5	44	2039	29.6	9.8	11	1N+2S+2P
3461030604	265/60R18 SL 110H	600AB	BSW	36.5	8.0	7.5-9.5	44	2337	30.5	10.7	12	1N+2S+2P
3557030709	255/55R18 SL 109V	600AB	BSW	31.8	8.0	7-9	44	2039	29.0	10.4	12	1N+2S+2P
3479030609	255/60R19 SL 109H	600AB	BSW	36.4	7.5	7-8.5	44	2270	31.1	10.2	12	1N+2S+2P
3576030709	225/55R19 SL 99V	600AB	BSW	27.2	7.0	6-8	44	1709	28.8	9.2	11	1N+2S+2P
3547030709	235/55R19 SL 101V	600AB	BSW	28.5	7.5	6.5-8.5	44	1820	29.2	9.6	11	1N+2S+2P
3571030709	245/55R19 SL 103V	600AB	BSW	30.0	7.5	7-8.5	44	1930	29.6	10.0	11	1N+2S+2P
3468030604	275/60R20 SL 115H	600AB	BSW	41.7	8.0	7.5-9.5	44	2679	33.0	11.0	12	1N+2S+2P
3573030609	255/55R20 XL 110H	600AB	BSW	34.9	8.0	7-9	50	2335	31.0	10.4	12	1N+2S+2P
3565030604	275/55R20 SL 113H	600AB	BSW	40.7	8.5	7.5-9.5	44	2535	31.9	11.2	12	1N+2S+2P
3637030709	245/50R20 SL 102V	600AB	BSW		7.5	7-8.5	44	1875	29.7	10.0	12	1N+2S+2P
3664030504	265/50R20 XL 111T	600AB	BSW	35.4	8.5	7.5-9.5	50	2403	30.5	10.9	12	1N+2S+2P
3788030604	285/45R22 XL 114H	600AB	BSW	38.5	9.5	9-10.5	50	2601	32.1	11.2	11	1N+2S+2P
9235030404	LT235/75R15 6PR 104/101S	C	BSW	33.5	6.5	6-7	50	1985/1820	28.9	9.3	13	1N+2S+2P
9215030104	LT215/85R16 10PR 115/112R	E	BSW	34.5	6.0	5.5-7	80	2680/2470	30.4	8.5	13	1N+2S+2P
9235030504	LT235/85R16 10PR 120/116S	E	BSW	39.9	6.5	6-7.5	80	3042/2778	31.7	9.3	13	1N+2S+2P
9225030404	LT225/75R16 10PR 115/112S	E	BSW	35.0	6.0	6-7	80	2680/2470	29.3	8.8	13	1N+2S+2P
9245030404	LT245/75R16 10PR 120/116S	E	BSW	39.0	7.0	6.5-8	80	3042/2778	30.5	9.8	13	1N+2S+2P
9265030404	LT265/75R16 10PR 123/120S	E	BSW	44.4	7.5	7-8	80	3415/3085	31.7	10.5	14.5	1N+2S+2P
9235030204	LT235/80R17 10PR 120/117R	E	BSW	40.3	6.5	6-8	80	3085/2835	31.8	9.3	13	1N+2S+2P
9245030204	LT245/75R17 10PR 121/118S	E	BSW	41.3	7.0	6.5-8	80	3195/2910	31.5	9.8	13	1N+2S+2P
9265030204	LT265/70R17 10PR 121/118S	E	BSW	44.9	8.0	7-8.5	80	3195/2910	31.7	10.7	14.5	1N+2S+2P
9265030304	LT265/70R18 10PR 124/121S	E	BSW	48.8	8.0	7-9	80	3525/3195	32.6	10.7	14.5	1N+2S+2P
9275030404	LT275/70R18 10PR 125/122S	E	BSW	51.2	8.0	7-8.5	80	3640/3305	33.2	11.0	14.5	1N+2S+2P
9275030204	LT275/65R18 10PR 123/120S	E	BSW	50.0	8.0	7.5-9	80	3415/3085	32.1	11.0	14.5	1N+2S+2P
9275030304	LT275/65R20 10PR 126/123S	E	BSW	52.9	8.0	7.5-9.5	80	3750/3415	34.1	11.0	14.5	1N+2S+2P
9285030409	LT285/50R20 10PR 119/116S	E	BSW	46.7	9.0	8.5-10	80	3000/2755	31.3	11.7	13	1N+2S+2P

ALL SPECIFICATIONS SUBJECT TO CHANGE

TORMENTA A/T FSR308

45K

LT Sizes

50K

Metric Sizes

M+S

M+S



3PMS

**ALL-TERRAIN ALL-WEATHER TIRE
DESIGNED FOR SUV'S AND TRUCKS
NEEDING MORE TRACTION AND LONG
MILEAGE**

FEATURES & BENEFITS:

- 3 Peak Mountain Snowflake rated for all weather conditions
- Unique tread pattern and wider footprint improves traction and stability in all terrains
- Enhanced sidewall design for superior performance and durability in all terrains
- Dual Pitch design with PNS (Pattern Noise Simulation) technology reduces noise and improves comfort in on-highway conditions



SAP CODE	TIRE SIZE	UTQG LOAD RANGE	SIDEWALL	WEIGHT (LBS)	RIM WIDTH (IN)	RIM RANGE	MAX PSI	MAX LOAD SINGLE / DUAL	OD (IN)	SW (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
3120030505	245/75R16 SL 111T	560AB	OWL	37.6	7.0	6.5-8	44	2403	30.5	9.8	13	1N+2S+2P
3123030505	265/75R16 SL 116T	560AB	OWL	41.7	7.5	7-9	44	2756	31.7	10.5	13	1N+2S+2P
3267030505	265/70R16 SL 112T	560AB	OWL	39.9	8.0	7-9	44	2469	30.6	10.7	13	1N+2S+2P
3260030505	245/70R17 SL 110T	560AB	OWL	37.8	7.0	6.5-8	44	2337	30.6	9.8	13	1N+2S+2P
3268030505	265/70R17 SL 115T	560AB	OWL	41.8	8.0	7-9	44	2679	31.7	10.7	13	1N+2S+2P
3350030505	245/65R17 SL 111T	560AB	OWL	35.1	7.0	7-8.5	50	2403	29.5	9.8	13	1N+2S+2P
3354030505	265/65R17 SL 112T	560AB	OWL	39.2	8.0	7.5-9.5	44	2469	30.6	10.7	13	1N+2S+2P
3364030505	265/65R18 SL 114T	560AB	BSW	40.4	8.0	7.5-9.5	44	2601	31.5	10.7	13	1N+2S+2P
3357030505	275/65R18 SL 116T	560AB	BSW	42.2	8.0	7.5-9.5	44	2756	32.1	11.0	13	1N+2S+2P
3468030505	275/60R20 SL 115T	560AB	BSW	43.2	8.0	7.5-9.5	44	2679	33.0	11.0	13	1N+2S+2P
3566030505	275/55R20 XL 117T	560AB	BSW	40.6	8.5	7.5-9.5	50	2833	31.9	11.2	12	1N+2S+2P
9235030305	LT235/85R16 10PR 120/116R	E	BSW	41.0	6.5	6-7.5	80	3042/2778	31.7	9.3	15	1N+2S+2P
9225030405	LT225/75R16 10PR 115/112S	E	BSW	36.8	6.0	6-7	80	2680/2470	29.3	8.8	15	1N+2S+2P
9245030205	LT245/75R16 10PR 120/116S	E	OWL	42.5	7.0	6.5-8	80	3042/2778	30.5	9.8	15	1N+2S+2P
9265030405	LT265/75R16 10PR 123/120S	E	BSW	45.4	7.5	7-8	80	3415/3085	31.7	10.5	15	1N+2S+2P
9285030305	LT285/75R16 10PR 126/123R	E	OWL	53.7	8.0	7.5-9	80	3750/3415	32.8	11.3	15	1N+2S+2P
9235030304	LT235/80R17 10PR 120/117R	E	BSW	41.0	6.5	6-7.5	80	3085/2835	31.8	9.3	15	1N+2S+2P
9245030304	LT245/75R17 10PR 121/118S	E	OWL	44.7	7.0	6.5-7.5	80	3195/2910	31.5	9.8	15	1N+2S+2P
9245030305	LT245/70R17 10PR 119/116S	E	OWL	42.5	7.0	6.5-8	80	3000/2755	30.6	9.8	15	1N+2S+2P
9265030205	LT265/70R17 10PR 121/118S	E	OWL	46.9	8.0	7-8.5	80	3195/2910	31.7	10.7	15	1N+2S+2P
9285030405	LT285/70R17 10PR 121/118S	E	OWL	54.4	8.5	7.5-9	80	3195/2910	32.8	11.5	15	1N+2S+2P
9265030105	LT265/70R18 10PR 124/121S	E	BSW	50.0	8.0	7-9	80	3525/3195	32.6	10.7	15	1N+2S+2P
9275030205	LT275/70R18 10PR 125/122S	E	BSW	52.5	8.0	7-8.5	80	3640/3305	33.2	11.0	15	1N+2S+2P
9275030405	LT275/65R18 10PR 123/120S	E	BSW	50.8	8.0	7.5-9	80	3415/3085	32.1	11.0	15	1N+2S+2P
9275030305	LT275/65R20 10PR 126/123S	E	BSW	53.6	8.0	7.5-9.5	80	3750/3415	34.1	11.0	15	1N+2S+2P
9265030505	LT265/60R20 10PR 121/118S	E	BSW	48.0	8.0	7.5-9.5	80	3195/2910	32.5	10.7	15	1N+2S+2P
9325030405	LT325/60R20 10PR 126/123S	E	BSW	65.9	9.5	9-12	65	3750/3415	35.4	13.0	15	1N+2S+2P
9285030505	LT285/55R20 10PR 122/119S	E	BSW	53.0	9.0	8-10	80	3305/3000	32.4	11.7	15	1N+2S+2P
9265030305	31X10.50R15LT 6PR 109S	C	OWL	42.3	8.5	7-9	50	2270	30.5	10.6	15	1N+2S+2P

ALL SPECIFICATIONS SUBJECT TO CHANGE

TORMENTA R/T

FSR309



RUGGED TERRAIN ALL-WEATHER TIRE DESIGNED FOR TRUCKS NEEDING AGGRESSIVE TRACTION WITHOUT SACRIFICING MILEAGE

FEATURES & BENEFITS:

- 3 Peak Mountain Snowflake rated for all weather conditions
- Rugged 3-ply sidewall construction for protection in an off-road environment
- Aggressive tread design features two and three-step tread blocks for added stability and durability when in rugged terrain
- Mud rippers in between shoulder tread blocks offer additional mud and debris extraction
- Mud movers in center tread blocks help clear mud and debris
- Opposing rugged sidewall designs provide not only two great looks but offer additional protection from rocks and debris when off-road



SAP CODE	TIRE SIZE	UTQG LOAD RANGE	SIDEWALL	WEIGHT (LBS)	RIM WIDTH (IN)	RIM RANGE	MAX PSI	MAX LOAD SINGLE / DUAL	OD (IN)	SW (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
9265030141	LT265/70R17 10PR 121/118Q	E	BSW	53.0	8.0	7-9	80	3195/2910	31.7	10.7	17	1N+2S+3P
9285030241	LT285/70R17 10PR 121/118Q	E	BSW	57.5	8½j	7.5-9.5	80	3195/2910	32.8	11.5	17	1N+2S+3P
9295030241	LT295/70R17 10PR 121/118Q	E	BSW	60.8	8.5	7.5-10	80	3195/2910	33.3	11.8	17	1N+2S+3P
9265030041	LT265/65R17 10PR 120/117Q	E	BSW	50.5	8.0	8-9.5	80	3085/2835	30.6	10.7	17	1N+2S+3P
9285030541	LT285/75R18 10PR 129/126Q	E	BSW	60.8	8.0	7.5-9.5	80	4080/3750	34.8	11.3	17	1N+2S+3P
9265030441	LT265/70R18 10PR 124/121Q	E	BSW	56.0	8j	7-9	80	3525/3195	32.6	10.7	17	1N+2S+3P
9275030241	LT275/70R18 10PR 125/122Q	E	BSW	56.6	8.0	7-9	80	3640/3305	33.2	11.0	17	1N+2S+3P
9295030041	LT295/70R18 10PR 129/126Q	E	BSW	60.6	8½j	7.5-10	80	4080/3750	34.3	11.8	17	1N+2S+3P
9265030341	LT265/65R18 10PR 122/119Q	E	BSW	53.7	8j	8-9.5	80	3305/3000	31.5	10.7	17	1N+2S+3P
9275030141	LT275/65R18 10PR 123/120Q	E	BSW	56.7	8j	8-9.5	80	3415/3085	32.1	11.0	17	1N+2S+3P
9285030441	LT285/65R18 10PR 125/122Q	E	BSW	57.5	8½	8.5-10	80	3640/3305	32.6	11.5	17	1N+2S+3P
9265030241	LT265/60R18 10PR 119/116Q	E	BSW	53.0	8.0	8-9.5	80	3000/2755	30.5	10.7	17	1N+2S+3P
9285030341	LT285/60R18 10PR 122/119Q	E	BSW	55.0	8.0	8.5-10	80	3000/2755	31.5	11.5	17	1N+2S+3P
9275030041	LT275/65R20 10PR 126/123Q	E	BSW	59.3	8.0	8-9.5	80	3750/3415	34.1	11.0	17	1N+2S+3P
9295030141	LT295/65R20 10PR 129/126Q	E	BSW	66.9	8½j	8.5-10.5	80	4080/3750	35.1	12.5	17	1N+2S+3P
9275030441	LT275/60R20 10PR 123/120Q	E	BSW	57.5	8j	8-9.5	80	3415/3085	33.0	11.0	17	1N+2S+3P
9285030141	LT285/60R20 10PR 125/122Q	E	BSW	58.5	8.5	8.5-10	80	3640/3305	33.5	11.5	17	1N+2S+3P
9295030341	LT295/60R20 10PR 126/123Q	E	BSW	60.2	8.5	8.5-10.5	80	3750/3415	33.9	11.8	17	1N+2S+3P
9325030141	LT325/60R20 10PR 126/123Q	E	BSW	71.2	9½j	9.5-11.5	65	3750/3415	35.4	13.0	18	1N+2S+3P
9275030341	LT275/55R20 10PR 120/117Q	E	BSW	57.6	8½j	8-9.5	80	3085/2835	31.9	11.2	17	1N+2S+3P
9285030041	LT285/55R20 10PR 122/119Q	E	BSW	59.2	9j	8.5-10	80	3305/3000	32.4	11.7	17	1N+2S+3P
9295030441	LT295/55R20 10PR 123/120Q	E	BSW	62.2	9½j	8.5-10.5	80	3415/3085	32.8	11.8	17	1N+2S+3P
9305030041	LT305/55R20 10PR 121/118Q	E	BSW	66.6	9½j	9-11	65	3195/2910	34.1	13.6	18	1N+2S+3P
9265030541	LT265/50R20 10PR 115/112Q	E	BSW	52.5	8½j	8-9.5	80	2680/2470	30.5	10.9	17	1N+2S+3P
9285030641	LT285/50R20 10PR 119/116Q	E	BSW	56.6	9j	8.5-10	80	3000/2755	31.3	11.7	17	1N+2S+3P
9285030741	LT285/50R22 10PR 121/118Q	E	BSW	61.7	9j	8.5-10	80	3195/2910	33.3	11.7	17	1N+2S+3P
9325030041	LT325/50R22 12PR 127Q	F	BSW	72.7	10j	9.5-11.5	80	3860	34.8	12.2	18	1N+2S+3P
9315030441	35X12.50R17LT 10PR 121Q	F	BSW	65.2	10.0	8-10.5	80	3195	36.5	12.5	18	1N+2S+3P
9315030841	37X12.50R17LT 10PR 121Q	E	BSW	77.2	10.0	8-10.8	80	3195	36.5	12.8	18	1N+2S+3P
9345030041	37X13.50R17LT 10PR 121Q	E	BSW	76.9	11j	9-11.5	65	3195	36.5	13.6	18	1N+2S+3P
9315030741	33X12.50R18LT 12PR 122Q	F	BSW	63.7	10.0	8.5-11	80	3305	32.5	12.5	18	1N+2S+3P
9315030541	35X12.50R18LT 12PR 128Q	F	BSW	65.5	10.0	8.5-11	80	3970	34.5	12.5	18	1N+2S+3P
9345030141	37X13.50R18LT 12PR 128Q	F	BSW	77.5	11j	9-11.5	80	3970	36.5	13.6	18	1N+2S+3P
9315030141	33X12.50R20LT 12PR 119Q	F	BSW	65.4	10j	8.5-11	80	3000	32.5	12.5	18	1N+2S+3P
9315030241	35X12.50R20LT 10PR 121Q	E	BSW	68.6	10.0	8.5-11	65	3195	34.5	12.5	18	1N+2S+3P
9315030341	35X12.50R20LT 12PR 125Q	F	BSW	68.6	10.0	8.5-11	80	3640	34.5	12.5	18	1N+2S+3P
9345030341	35X13.50R20LT 10PR 121Q	E	BSW	73.2	11j	8.5-11	65	3195	34.5	13.2	18	1N+2S+3P
9315030641	37X12.50R20LT 10PR 126Q	E	BSW	70.4	11.0	8.5-11	65	2860	36.5	12.5	18	1N+2S+3P
9345030241	37X13.50R20LT 10PR 127Q	E	BSW	75.7	11.0	9.5-12	65	3860	36.5	13.6	18	1N+2S+3P
9315030041	33X12.50R22LT 12PR 114Q	F	BSW	66.2	10j	8.5-11	80	2600	32.5	12.5	18	1N+2S+3P
9315030941	35X12.50R22LT 10PR 117Q	E	BSW	69.6	10j	8.5-11	65	2835	34.5	12.4	18	1N+2S+3P
9315031141	37X12.50R22LT 10PR 123Q	E	BSW	73.4	10j	8.5-11	65	3415	36.5	12.5	18	1N+2S+3P
9345030541	37X13.50R22LT 10PR 123Q	E	BSW	79.3	11j	9.5-12	65	3415	36.5	13.6	18	1N+2S+3P
9315031041	35X12.50R24LT 12PR 116Q	F	BSW	73.1	10½j	10-12	80	2755	34.5	12.5	18	1N+2S+3P
9345030441	37X13.50R24LT 12PR 124Q	F	BSW	79.2	11j	9.5-12	80	3525	36.5	13.6	18	1N+2S+3P
9395030241	40X15.50R24LT 10PR 128Q	E	BSW	96.8	12½j	11-14	65	3970	39.5	15.5	18	1N+2S+3P

ALL SPECIFICATIONS SUBJECT TO CHANGE

TORMENTA M/T FSR310



**MUD TERRAIN ALL-WEATHER TIRE
DESIGNED FOR TRUCKS REQUIRING
AGGRESSIVE TRACTION IN OFF-ROAD
CONDITIONS**

FEATURES & BENEFITS:

- 3 Peak Mountain Snowflake rated for all weather conditions
- Rugged 3 ply side wall construction for protection in the off-road environment
- Wide pattern and block design improves stability and wear resistance in harsh conditions
- Mud rippers in between shoulder tread blocks offer additional mud and debris extraction
- Studdable using TSMI #15



SUV & LIGHT TRUCK

SAP CODE	TIRE SIZE	UTQG LOAD RANGE	SIDEWALL	WEIGHT (LBS)	RIM WIDTH (IN)	RIM RANGE	MAX PSI	MAX LOAD SINGLE / DUAL	OD (IN)	SW (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
9235030006	LT235/75R15 8PR 110/107Q	D	BSW	39.8	6.5	6-8	65	2335/2150	28.9	9.3	18	1N+2S+2P
9235030211	LT235/85R16 10PR 120/116Q	E	BSW	48.0	6.5	6-7.5	80	3042/2778	31.7	9.3	18	1N+2S+3P
9245030206	LT245/75R16 10PR 120/116Q	E	BSW	47.6	7.0	6.5-8	80	3042/2778	30.5	9.8	18	1N+2S+3P
9265030206	LT265/75R16 10PR 123/120Q	E	BSW	53.5	7.5	7-8	80	3415/3085	31.7	10.5	19	1N+2S+3P
9285030106	LT285/75R16 10PR 126/123Q	E	BSW	59.8	8.0	7.5-9	80	3750/3415	32.8	11.3	20	1N+2S+3P
9305030206	LT305/70R16 10PR 124/121Q	E	BSW	61.8	9.0	8-9.5	65	3525/3195	32.8	12.2	20	1N+2S+3P
9265030306	LT265/70R17 10PR 121/118Q	E	BSW	54.3	8.0	7-8.5	80	3195/2910	31.7	10.7	19	1N+2S+3P
9285030206	LT285/70R17 10PR 121/118Q	E	BSW	60.7	8.5	7.5-9	80	3195/2910	32.8	11.5	20	1N+2S+3P
9275030206	LT275/65R18 10PR 123/120Q	E	BSW	57.8	8.0	8-9.5	80	3415/3085	32.1	11.0	19	1N+2S+3P
9305030211	LT305/55R20 10PR 121/118Q	E	BSW	66.4	9.5	9-11	65	3195/2910	33.2	12.4	20	1N+2S+3P
9325030211	LT325/50R22 10PR 122Q	E	BSW	73.2	10.0	9.5-11.5	65	3305	34.8	13.2	20	1N+2S+3P
9265030006	31X10.50R15LT 6PR 109Q	C	BSW	47.8	8.5	7-9	50	2270	30.5	10.6	20	1N+2S+2P
9315030806	33X12.50R15LT 6PR 108Q	C	BSW	61.6	10.0	8.5-11	35	2205	32.5	12.5	20	1N+2S+3P
9315030906	35X12.50R17LT 10PR 121Q	E	BSW	67.8	10.0	8.5-11	65	3195	34.5	12.5	20	1N+2S+3P
9315030506	33X12.50R18LT 10PR 118Q	E	BSW	65.6	10.0	8.5-11	65	2910	32.5	12.5	20	1N+2S+3P
9315030306	35X12.50R18LT 10PR 123Q	E	BSW	68.8	10.0	8.5-11	65	3415	34.5	12.5	20	1N+2S+3P
9315030706	33X12.50R20LT 10PR 114Q	E	BSW	66.5	10.0	8.5-11	65	2600	32.5	12.5	20	1N+2S+3P
9315030206	35X12.50R20LT 10PR 121Q	E	BSW	71.1	10.0	8.5-11	65	3195	34.5	12.5	20	1N+2S+3P
9345030206	37X13.50R20LT 10PR 127Q	E	BSW	81.0	11.0	8.5-11	65	3860	36.5	13.6	21	1N+2S+3P
9315030211	33X12.50R22LT 10PR 109Q	E	BSW	65.2	10.0	8.5-11	65	2270	32.5	12.5	19	1N+2S+3P
9315030111	35X12.50R22LT 12PR 121Q	F	BSW	70.5	10.0	8.5-11	80	3195	34.5	12.5	20	1N+2S+3P
9315030411	37X12.50R22LT 12PR 127Q	F	BSW	75.7	10.0	8.5-11	80	3860	36.5	12.5	20	1N+2S+3P
9345030111	37X13.50R22LT 12PR 128Q	F	BSW	82.0	11.0	9.5-12	80	3970	36.5	13.6	21	1N+2S+3P

ALL SPECIFICATIONS SUBJECT TO CHANGE

TORMENTA LMD FSR103

COMMERCIAL VAN AND LIGHT TRUCK ALL-WEATHER TIRE



M+S



3PM5

FEATURES & BENEFITS:

- 3 Peak Mountain Snowflake rated for all weather conditions
- 4 central wide grooves for excellent water evacuation in wet conditions
- Features high-depth sipes with multiple biting edges to improve driving safety in various road conditions
- Specialized tread compound to combat scratches, chips, and cuts in a high scrub application
- Strengthened sidewall construction for improved load capability and durability against curb damage
- Thicker under-tread combined with a reinforced belt design prevents punctures and ensures driving safety
- Tie-bar linked tread blocks with optimized shoulder blocks increases footprint to prevent irregular wear



COMMERCIAL VAN & LIGHT TRUCK

SAP CODE	TIRE SIZE	UTQG LOAD RANGE	SIDEWALL	WEIGHT (LBS)	RIM WIDTH (IN)	RIM RANGE	MAX PSI	MAX LOAD SINGLE / DUAL	OD (IN)	SW (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
9185030575	185/60R15C 6PR 94/92T	C	BSW	26.0	5.5	5.5-6.0	54	1477/1389	23.7	7.4	13	1N+2S+2P
9195030375	195/75R16C 8PR 107/105R	D	BSW	30.0	5.5	5.0-6.0	69	2150/2040	27.5	7.7	13	1N+2S+2P
9205030375	205/75R16C 10PR 113/111R	E	BSW	28.2	5.5	5.5-6.5	76	2535/2405	28.1	8.0	13	1N+2S+2P
9225030375	225/75R16C 10PR 121/120R	E	BSW	35.3	6.0	6.0-7.0	83	3195/3085	29.3	8.8	13	1N+2S+2P
9235030375	235/65R16C 10PR 121/119R	E	BSW	34.5	7.0	6.5 -7.5	80	3195/3000	28.0	9.3	13	1N+2S+2P
9215030375	LT215/85R16 10PR 115/112R	E	BSW	35.7	6.0	5.5-7.0	80	2680/2470	30.4	8.5	13	1N+2S+2P
9235030475	LT235/85R16 10PR 120/116R	E	BSW	39.7	6.5	6.0-7.5	80	3042/2778	31.7	9.3	13	1N+2S+2P
9225030475	LT225/75R16 10PR 115/112R	E	BSW	35.3	6.0	6.0-7.5	80	2680/2470	29.3	8.8	13	1N+2S+2P
9245030575	LT245/75R16 10PR 120/116S	E	BSW	38.8	7.0	6.5-8.0	80	3042/2778	30.5	9.8	13	1N+2S+2P
9265030375	LT265/75R16 10PR 123/120R	E	BSW	41.0	7.5	7.0-9.0	80	3415/3085	31.7	10.5	14.5	1N+2S+2P
9235030575	LT235/80R17 10PR 120/117R	E	BSW	40.8	6.5	6.0-7.5	80	3085/2835	31.8	9.3	13	1N+2S+2P
9245030475	LT245/75R17 10PR 121/118S	E	BSW	41.9	7.0	6.5-8.0	80	3195/2910	31.5	9.8	13	1N+2S+2P
9245030375	LT245/70R17 10PR 119/116S	E	BSW	40.6	7.0	6.5-8.0	80	3000/2755	30.6	9.8	13	1N+2S+2P
9265030475	LT265/70R17 10PR 121/118R	E	BSW	41.9	8.0	7.0-9.0	80	3195/2910	31.7	10.7	14.5	1N+2S+2P
9275030475	LT275/70R18 10PR 125/122S	E	BSW	48.5	8.0	7.0-9.0	80	3640/3305	33.2	11.0	14.5	1N+2S+2P
9275030375	LT275/65R18 10PR 123/120R	E	BSW	46.3	8.0	8.0-9.5	80	3415/3085	32.1	11.0	14.5	1N+2S+2P

ALL SPECIFICATIONS SUBJECT TO CHANGE

ST RADIAL

ST01



SPECIALTY TRAILER TIRE FOR BOAT, CARGO, HORSE, TOY, AND OTHER TRAILER NEEDS

FEATURES & BENEFITS:

- Continuous center rib for better stability and tracking
- Nylon spiral wrap for improved uniformity and protection against heat buildup
- All Season M+S rated
- Strengthened sidewall construction for improved load capability and durability against curb damage
- For Trailer Use Only



SPECIALTY TRAILER

SAP CODE	TIRE SIZE	UTQG LOAD RANGE	SIDEWALL	WEIGHT (LBS)	RIM WIDTH (IN)	RIM RANGE	MAX PSI	MAX LOAD SINGLE / DUAL	OD (IN)	SW (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
9175031271	ST175/80R13 8PR 97/93L	D	BSW	16.4			65	1609/1433	24.0	7.0	8	
9205030171	ST205/75R14 8PR 105/101M	D	BSW	21.5			65	2040/1820	26.2	8.0	8	
9215031271	ST215/75R14 8PR 108/103L	D	BSW	22.3			65	2205/1929	26.7	8.5	8	
9205030871	ST205/75R15 6PR 101/97M	C	BSW	21.2			50	1820/1610	27.1	8.0	8	
9205031171	ST205/75R15 8PR 107/102M	D	BSW	21.5			65	2040/1820	26.2	8.0	8	
9225031171	ST225/75R15 8PR 113/108M	D	BSW	25.8			65	2540/2200	28.3	8.8	9	
9225030271	ST225/75R15 10PR 117/112M	E	BSW	27.1			80	2830/2470	28.3	8.8	9	
9235031071	ST235/80R16 10PR 124/120M	E	BSW	32.0			80	3520/3080	30.8	9.3	9	
9235031171	ST235/85R16 10PR 125/121M	E	BSW	34.9			80	3640/3200	31.8	9.3	9	

ALL SPECIFICATIONS SUBJECT TO CHANGE

When an unexpected tire failure happens, your customers are protected with a Premium Tire Roadside Assistance Program with the purchase of the Fortune ST-01 or Fortune FST02 Tires. Counter top cards will be made available at tire purchase to assist your customer in utilizing this program. The Roadside Assistance Program presents a great selling opportunity to add a spare ST or FST Trailer tire to their purchase.

What to expect: Your customer simply telephones our toll-free Roadside Assistance number and a qualified service provider will replace the damaged tire with an inflated spare. If the customer does not carry an inflated spare, and a tow or other services are necessary, a towing service will be provided to the nearest qualified repair facility at no expense to the customer up to \$100 of service. The customer will be solely responsible for any charges incurred above the \$100 benefit limit.

24-HOUR ROADSIDE ASSISTANCE

1-855-568-6608

Account Number: 690003



ST RADIAL

FST02



Trailer

**ALL STEEL SPECIALTY TRAILER TIRE
DESIGNED FOR TRAILERS REQUIRING
INCREASED LOAD AND DURABILITY**

FEATURES & BENEFITS:

- Unique sipe distribution offers good tire traction, handling and safety
- New polybutadiene rubber and optimized footprint shape ensures excellent wear resistance performance
- Provides resistance to stone drilling
- Trailer use only



SPECIALTY TRAILER

SAP CODE	SIZE	PLY RATING	LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	RIM WIDTH (IN)	OD (IN)	SW (IN)	REVS / MILE	TREAD CONSTRUCTION
2519030002	ST225/90R16	14PR	G	129/125L	13	4080	110	3640	110	6J	31.8	8.7	653	1S+3S
2525030002	ST235/80R16	14PR	G	129/125L	12	4080	110	3640	110	6½J	30.8	9.3	675	1S+3S
2526030002	ST235/85R16	14PR	G	132/127L	12	4400	110	3860	110	6½J	31.8	9.3	655	1S+3S

ALL SPECIFICATIONS SUBJECT TO CHANGE

When an unexpected tire failure happens, your customers are protected with a Premium Tire Roadside Assistance Program with the purchase of the Fortune ST-01 or Fortune FST02 Tires. Counter top cards will be made available at tire purchase to assist your customer in utilizing this program. The Roadside Assistance Program presents a great selling opportunity to add a spare ST or FST Trailer tire to their purchase.

What to expect: Your customer simply telephones our toll-free Roadside Assistance number and a qualified service provider will replace the damaged tire with an inflated spare. If the customer does not carry an inflated spare, and a tow or other services are necessary, a towing service will be provided to the nearest qualified repair facility at no expense to the customer up to \$100 of service. The customer will be solely responsible for any charges incurred above the \$100 benefit limit.

24-HOUR ROADSIDE ASSISTANCE

1-855-568-6608

Account Number: 690003





2023 Limited Passenger Car and Light Truck Tire Warranty for USA and Canada

ELIGIBILITY

YOU ARE COVERED UNDER THE TERMS OF THIS LIMITED WARRANTY IF:

- You are the original purchaser of new FORTUNE brand Passenger Car, Light Truck, or ST-01 ST Radial Tires and
- Your tires bear Department of Transportation prescribed tire identification numbers and are not branded "NA" (Not Adjustable), or "Blem" (Blemish) and
- Your FORTUNE brand Passenger Car, Light Truck, or ST-01 ST Radial Tires have been used only on the vehicle on which they were originally installed according to the vehicle or tire manufacturer's recommendations and
- Your FORTUNE brand Passenger Car, Light Truck, or ST-01 ST Radial Tires were purchased from an authorized FORTUNE tire dealer as determined by Prinx Chengshan Tire North America.

WHAT IS COVERED AND FOR HOW LONG?

NO-CHARGE REPLACEMENT

FORTUNE tires covered by this warranty that become unserviceable due to Road Hazard, or a defect in workmanship or material during the first 2/32nds of usable tread depth will be replaced with a comparable new FORTUNE tire without charge. If you are entitled to receive a no-charge warranty replacement tire, the mounting & balancing of that tire will also be provided at no charge. The cost of any other service charges, disposal fees or applicable taxes are payable by you.

PRO-RATED REPLACEMENT

Tires worn beyond the first 2/32nds of usable tread that become unserviceable due to a defect in workmanship or material will be replaced on a prorated basis. The cost of mounting and balancing and other service charges, disposal fees or applicable taxes are payable by you.

HOW PRORATED CHARGES ARE CALCULATED

The replacement price will be calculated by multiplying the dealer's current FORTUNE replacement tire price by the percent of tread worn out from the original tread. The cost of mounting, balancing, and other service charges, disposal fees, or applicable taxes are payable by you.

WHAT IS A COMPARABLE TIRE?

A "comparable" new FORTUNE tire may either be the same line of tire or, if the tire is not available, a tire of the same basic construction and quality with a different sidewall or tread design. If a higher-priced tire is accepted as replacement, the difference in price will be at an additional charge to you. Any replacement tire provided pursuant to this warranty will be covered by the FORTUNE passenger car and light truck warranty in effect at the time of replacement.

WHAT IS NOT COVERED BY THIS WARRANTY?

1. Tires branded or marked "Non-adjustable (N/A)", or "Blemished (Blem)", or previously adjusted.
2. Irregular wear or tire damage due to:
 - a) Road Hazards (including punctures, cuts, snags, impact breaks, etc.) after the first 2/32nds
 - b) Wreck, collision, fire, or vandalism.
 - c) Improper inflation, overloading, misapplication, misuse, negligence, high-speed tire spinning, chain damage, improper mounting or demounting.
 - d) Mechanical condition of the vehicle, including misalignment, wheel imbalance, faulty shocks or brakes.
3. Ride disturbance after the first 1/32nd (0.8mm) of tread depth or due to damaged wheels. "Ride disturbance" means shakes and bounces of vehicle caused by unbalanced tire-rim-assembly, out of round tires, etc., which bring unpleasant feelings or experience to drivers or passengers. Ride disturbance claims will also not be accepted on 3 or more tires from the same vehicle.
4. Cost of Mounting and Balancing unless the tire is eligible for NO-CHARGE REPLACEMENT.
5. Ozone or weather cracking on tires over four (4) years from the date of manufacture.
6. Alteration of the tire or addition of alien material or transfer from one vehicle to another.
7. Loss of time or use inconvenience, or any incidental or consequential damages.
8. Tires used in commercial service unless denoted for such use as by the manufacturer.
9. Tires used in racing or competitive related events.
10. Tires used outside the United States and/or Canada.
11. Tires purchased from unauthorized dealers.



WHEN DOES THE WARRANTY END?

When a FORTUNE brand Passenger Car or Light Truck Tire has delivered its full original tread life down to 2/32nds (1.6mm) remaining at any given spot in the tread area, or five (5) years from the new tire purchase date or seven (7) years from the date of original tire manufacture, whichever comes first. For ST Trailer tires warranty ends after the tire has delivered its full original tread life down to 2/32nds (1.6mm) remaining at any given spot in the tread area, or three (3) years from tire purchase date or five (5) years from the date of manufacturer, whichever comes first.

PASSENGER/LT LIMITED MILEAGE WARRANTIES

FSR702 - VIENTO UHP - 50,000 Miles / 80,000 km
FSR602 - PERFECTUS HP - 60,000 Miles / 95,000 km
FSR305 - TORMENTA H/T - 60,000 Miles Metric/ 45,000 Miles LT 95,000 km / 70,000 km
FSR308 - TORMENTA A/T - 50,000 Miles Metric/45,000 Miles LT 80,000 km/ 70,000 km
FSR309 - TORMENTA R/T - 50,000 Miles / 80,000 km

HOW DO YOU OBTAIN AN ADJUSTMENT?

In order to be eligible for FORTUNE Limited Warranty service, the owner must:

- A. Present the tire to an authorized FORTUNE dealer; and
- B. Present proof of purchase (if applicable) to the dealer.
- C. Complete and sign a FORTUNE New Tire Warranty Claim Form, which is available at any authorized dealer; and
- D. Pay the amount due on a new tire, less the amount of credit, including taxes, mounting and balancing charges or cost of other services ordered.

DISCLAIMER

This warranty or any warranty stated or referred to herein, is exclusive and in lieu of any other warranty regarding the quality of FORTUNE brand tires, whether expressed or implied, and remedies for breach thereof shall be limited to those specifically provided herein. To the extent permitted by law, Prinx Chengshan Tire Co. Ltd cannot be held responsible for incidental and consequential damages, loss of time, loss of vehicle use, or inconvenience. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This limited warranty applies only to consumers actually purchasing and using the tire in the United States and Canada. Obligations under this policy may not be enlarged or altered by anyone. In Accordance with Federal Law, this limited warranty has been designated as a "Limited Warranty". Nothing in this limited warranty is intended to be a representation that tire failures cannot occur.

This Limited warranty is effective as of January 1, 2023 and replaces any previous limited warranties. Conditions and coverage are subject to change at any time without prior notice.

Proper Tire Inflation and Tire Safety

WARNING

DEATH OR SERIOUS INJURY MAY RESULT FROM:

- (A) Tire failure due to under-inflation, over inflation and/or overloading.
- (B) Explosion of tire/rim assembly due to improper mounting. Only specially trained persons should mount tires.

Proper Inflation is Critical - Inflation pressure enables a tire to support the load and to control the vehicle, therefore proper inflation is critical. With the right amount of inflation pressure, the vehicle and the tires will achieve their optimum performance. In addition to tire safety, this means your tires will wear longer and improve vehicle fuel consumption. Note that some vehicles may have different cold inflation pressures for tires on the front and rear axles. The recommended inflation pressures for tires are typically measured in pounds per square inch (psi) and are indicated on the vehicle tire placard, certification label or in the owner's manual. Under inflation causes excessive heat build-up and internal structural damage that may lead to a tire failure, even at a later date. Over inflation makes it more likely for tires to be cut, punctured or broken by sudden impact. These situations can cause a tire failure, including tread/belt separation, even at a later date, which could lead to an accident and serious personal injury or death.

TIRE MOUNTING INSTRUCTIONS:

1. Only specially trained persons should mount tires. For detailed instructions on mounting passenger and light truck tires, refer to the USTMA wall chart "Demounting and Mounting Procedures for Passenger and Light Truck Tires." Read and understand the procedures and safety warnings before proceeding. Follow installation safety procedures for mounting and inflating tires.
2. Always lubricate both beads and rim flanges with approved rubber lubricant.
3. Always match rim diameter with tire diameter. Mount tire only on proper size rim. I.E.: Never mount a 16" tire on a 16.5" rim, it can cause severe injury or death.
4. Never inflate a tire that is lying on the floor or other flat surface. Always use a tire mounting machine with a hold down device, safety cage or bolted to the vehicle axle. Use a clip-on air chuck and in-line air valve of gauge.
5. Never stand, lean or reach over the tire and rim assembly when inflating.
6. Never inflate above 40 psi to seat beads.
7. After beads are seated, inflate to or adjust to the vehicle manufacturer recommended cold inflation pressure.

A more complete guide to Tire Care and Safety as well as proper mounting and demounting procedures is available from the US Tire Manufacturers Association website www.ustires.org/publications or by contacting them at USTMA 1400 K Street, NW, Suite 900 Washington, DC 20005.

Tire Information Service Bulletin

TIRES ON CERTAIN GLOBALIZED (“EURO”) VANS

There has been an increase in the variety of vans sold in the North American market that are based on platforms used around the world by vehicle manufacturers. These vans are commonly used in commercial service and come in various sizes and configurations with efficiency and cargo flexibility in mind.

This TISB is a reminder about proper tire replacement guidelines, particularly as it applies to globalized (“Euro”) vans and the differences in tire size designations that may be applied to them.

NOTE Before replacing tires, always refer to and follow the vehicle manufacturer’s tire replacement recommendations and restrictions.

Like all other vehicles, when considering tire replacement for Euro vans, carefully determine the tire size designation for the original equipment tires and the recommended replacement tires as specified on the vehicle tire placard, certification label, or in the vehicle owner’s manual. Depending on the van and its configuration, it may be equipped with P-Metric, LT-Metric, European Metric (Passenger), or European Commercial Metric tires.

Figures 1 and 2 are examples of placards from one of these increasingly popular model vans. These placards show that European C-Type tires are specified (note the “C” at the end of the tire size code).



FIGURE 1 (Above): Example Vehicle Certification Label

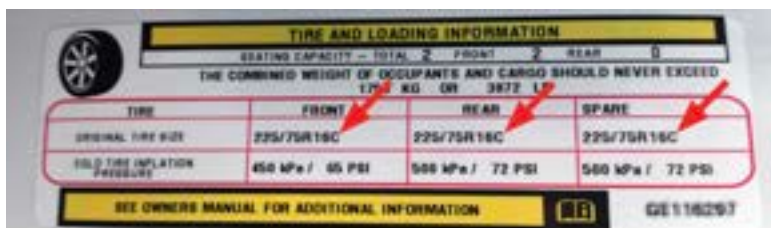


FIGURE 2 (Right): Example Vehicle Tire Placard

Tires with different size designations may not be interchangeable even if they have similar dimensions. For example, an LT-metric tire may not be a suitable replacement for a C-Type European Commercial Metric tire, even if the tires have similar section width, aspect ratio, and rim codes. Such tires typically have significantly different load carrying capacities. In other words: An LT225/75R16 is not the same as a 225/75R16C.


TIRE TYPE	SIZE CODE	LOAD INDEX AND SPEED SYMBOL	LOAD IDENTIFICATION	MAXIMUM LOAD CAPACITY AT RATED PRESSURE	
P-Metric (Passenger)	P225/75R16	104T	Standard Load	900 kg	240 kPa
European Metric (Passenger)	225/75R16	104T	Standard Load	900 kg	250 kPa
LT-Metric (Light Truck)	LT225/75R16	115/112R	Load Range E	1215/1120 kg	550 kPa
C-Type European Commercial Metric	225/75R16C	121/120R	Load Range E	1450/1400 kg	575 kPa

NOTE The “C” at the end of the size designation in Figure 3 below identifies the tire as a C-Type European Commercial Metric tire. The “C” is not a load range. The load range is marked separately on the tire sidewall as shown in Figure 4.

FIGURE 3: Size and Service Description of an Example C-Type European Commercial Metric Tire



FIGURE 4: Load Range, Max Load and Pressure Specifications for the Example Tire Shown in Figure 3

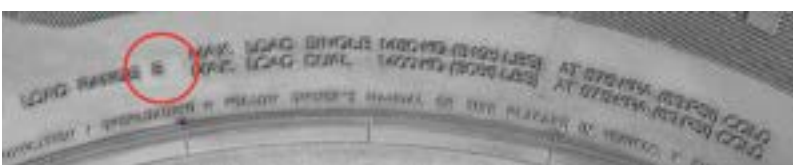

F★*ORTUNE*

TIRES

FORTUNE BRAND TIRES ARE IMPORTED AND
SOLD EXCLUSIVELY IN NORTH AMERICA BY:

PRINX CHENGSHAN TIRE NORTH AMERICA, INC.
5757 WEST CENTURY BLVD. SUITE 752
LOS ANGELES, CA 90045

FORTUNETIREUSA.COM

